













ASSEMBLY INSTRUCTIONS

ASSEMBLY:

- Inspect areas for safety hazards
- IF cable/cord has an end that is small enough to fit through the channel, insert end into channel and push it through to the other side.
- IF cable/cord has an end that is too large to fit through the channel, a utility knife can be used to carefully cut through the groove on the underside of the protector. Then insert the cable/cord into the channel through the slit on the underside.
- Assemble sections by aligning protectors.
- Select models can be securely attached to one another with connector pegs. To do so, simply align connector pegs with holes on the end of the cable protector and push in firmly to secure them. Then align second protector with pegs and firmly push the two cable protectors together (*see illustration*). Repeat this procedure to connect as many rubber duct protectors as needed.
- Test installation for intended use
- Periodically inspect installation

#ZIS-RFD-EJ
Ver: 2/09

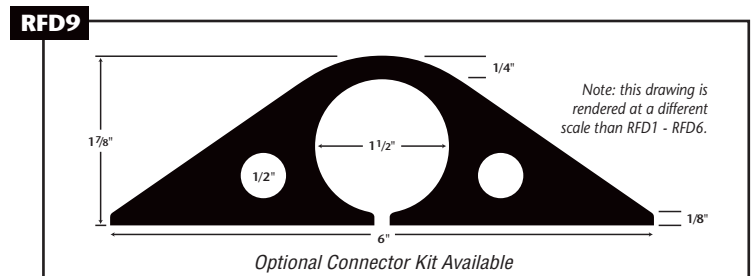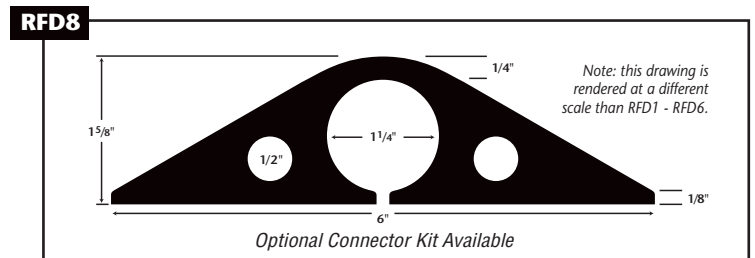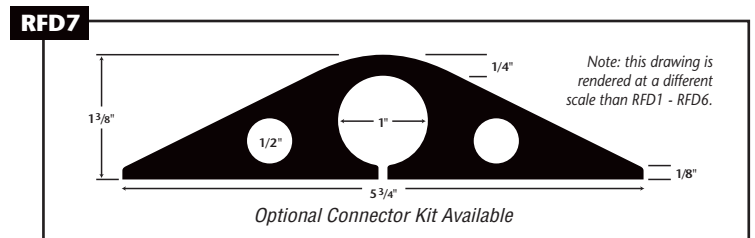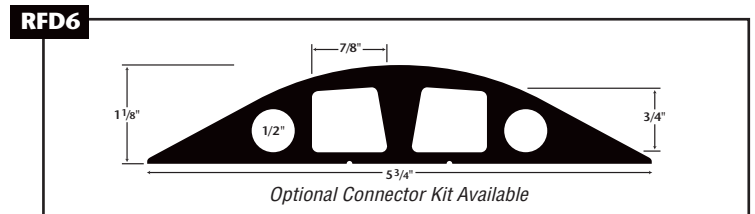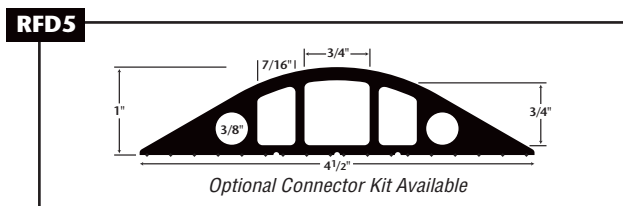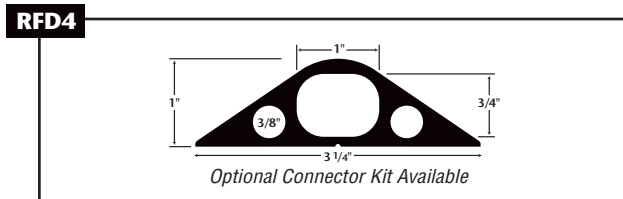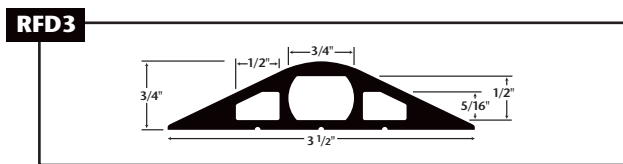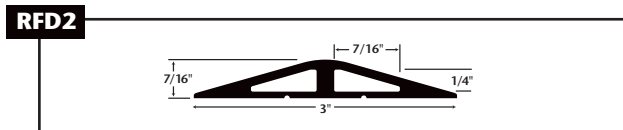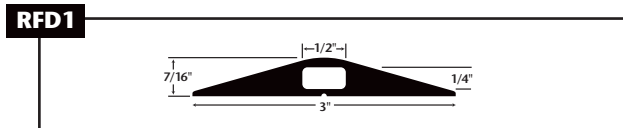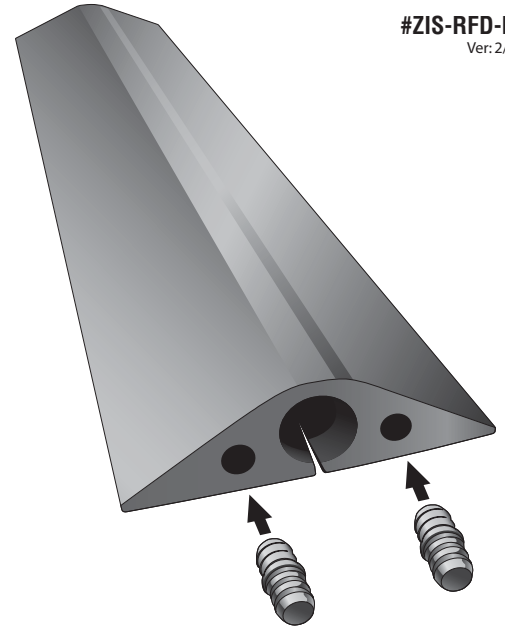

- All Powerback Protectors feature ribbed underside to prevent slipping.
- All Powerback Protectors are shipped unslit on the bottom except models RFD7, RFD8, and RFD9.



POWERBACK®
RUBBER DUCT PROTECTORS

RUBBER DUCT PROTECTORS

RUBBER DUCT PROTECTOR INSTALLATION INSTRUCTIONS

POWERBACK® is a cable/cord management system intended to reduce the possibility of damage to cables and cords that are subject to pedestrian and lightweight vehicle and cart traffic. It is intended for temporary installations only and must be in accordance with all applicable electrical, building and safety codes. DO NOT use splices within this system.

CAUTION: MISUSE CAN CAUSE ELECTRICAL SHOCK AND INJURY

- DO NOT use as work surface. NO CUTTING, NO DRILLING, NO HAMMERING.
- Use with momentary loads only, DO NOT place ladders, scaffolds, or any type of structure on the system.
- Avoid concentrated loads.
- Use only on a stable surface. Inclined surfaces, slippery surfaces and broken ground can cause injury.
- This system can be a trip hazard to pedestrian traffic if they are unaware of its presence.
- Keep the POWERBACK cable/cord management system clean and bright.
- Load-supporting capacity varies by type of loading conditions and environmental conditions. Test before use and inspect periodically.
- Keep various services, communications, and power separated. Limit a channel to one service type.
- Rubber is attacked by some chemicals. Always test a small amount for chemical compatibility before using and follow maintenance procedure.
- Lightweight vehicle and cart traffic must pass over this system slowly and with caution.

MAINTENANCE

- Store in a clean dry area.
- Inspect system for damage and replace it if damaged. Remove any foreign materials, solids and liquids. Keep clean by using a detergent and water solution.

WARRANTY AND LIABILITY

LIMITED WARRANTY: EJ Safety guarantees the products it manufactures or sells against defects in workmanship and material for a period of one (1) year from the date of shipment or date of invoice, whichever is later. The product must be used, maintained and installed according to the instructions and procedures provided, or this warranty is void. Any alteration or modification of the product will also void this warranty. **EJ SAFETY'S OBLIGATION UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCTS.** No other warranty or remedy shall be provided. This warranty specifically does not guarantee or cover payment or reimbursement of any damages or consequential damages beyond the above.

Any claim under this warranty must be made in writing within twelve (12) months of the date of shipment or the date of invoice, whichever is later. All products returned to EJ Safety under this warranty must be prepaid. If it is determined that the product is defective in material and /or workmanship the repair or replacement will occur, at EJ Safety's option, at no charge and return freight prepaid by EJ Safety. All other return of product to the owner shall be at the owner's expense.

EJ SAFETY AND ITS AUTHORIZED AGENTS, EMPLOYEES AND REPRESENTATIVES SPECIFICALLY AND EXPRESSLY DISCLAIM ANY AND ALL OTHER WARRANTIES, INCLUDING THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND/OR ANY WARRANTY OF MERCHANTABILITY WHICH MIGHT OTHERWISE BE APPLICABLE UNDER ANY STATE OR FEDERAL LAW.

LIMITED LIABILITY OF EJ SAFETY: EJ Safety and its authorized agents, distributors and representatives *do not guarantee* the performance of any EJ Safety product in the customer's use as the manufacturer is unable to assure proper use by the customer. Proper use by the customer is necessary for the effectiveness of the product, as well as the safety of those using same. The user is solely responsible to determine the suitability of any EJ Safety product for any intended use. The user assumes all risk and liability for use of any EJ Safety product.

User specifically acknowledges receipt of proper instructions regarding the use of the product in the original packaging and disclaims any consequential damages to person or property, damages for loss of use, lost time, loss of profit, lost income, loss of the EJ Safety's product itself and/or other incidental or consequential damages other than as warranted by EJ Safety's limited warranty. User accepts the responsibility of removing from service any product that becomes worn out, unusable, unfit for intended use or defective in any way such as to make the product a potential safety hazard. EJ Safety is unable to undertake such obligations or responsibilities on behalf of the user as the user is in sole possession and control of the product.

© 2009 EJ Safety

#ZIS-RFD-EJ
Ver: 2/09

EJ SAFETY

www.cableramps.com

7150 West Roosevelt St • Building B, Suite 149 • Phoenix, AZ 85043 • 623-478-1661 • Fax: 623-478-1619 • TOLL FREE: 866-442-1885